

# ACOUSTIC PRO



HIGH PERFORMANCE  
ACOUSTICAL  
FLOOR COVERING




## PERFORMANCE, FEATURES & BENEFITS

Excellent acoustic properties ( $\geq 19$  dB),  
Excellent foot comfort, Dimensionally stable,  
Increased lifespan, Antistatic, Anti-bacterial,  
7 year warranty

## RECOMMENDED USAGE

Healthcare | Education | Hospitality  
Corporate | Retail | Anywhere acoustical property  
is needed

## CONSTRUCTION

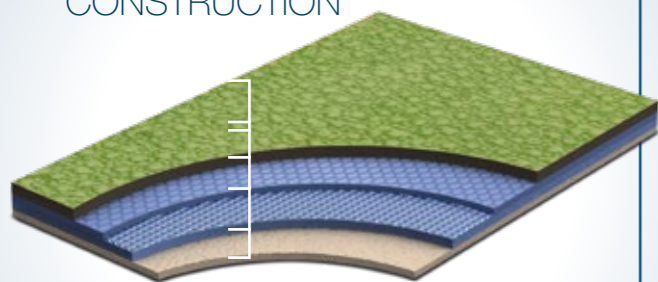

- PUR Surface Wear layer
- Design
- Compact layer
- Glass fibre reinforcement
- Foam backing

## DESCRIPTION

Construction		heterogeneous
Total thickness	EN ISO 24346	3,2 mm
Wear layer thickness	EN ISO 24340	0,55 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	25 lm
Total weight	EN ISO 23997	2,5 kg/m <sup>2</sup>


## CLASSIFICATION

European classification	EN 685	class: 33/42
-------------------------	--------	--------------

## PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,2 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
	BS 476	class: Class1
	Gost 30402-94	class: G1
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
Slip resistance	DIN 51130	R9
	AS/NZS 4586	R10
Electrical resistance	EN 1815	< 2 kV
	EN 1081	$\leq 10^9 \Omega$
Chemical resistance	EN ISO 26987	✓
Bacterial resistance	EN ISO846:1999	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment		PUR Surface
Anti bacterial and fungicid treatment		graboSAN
Seaming method		hot or cold welding
Warranty		7 year

# ACOUSTIC PRO

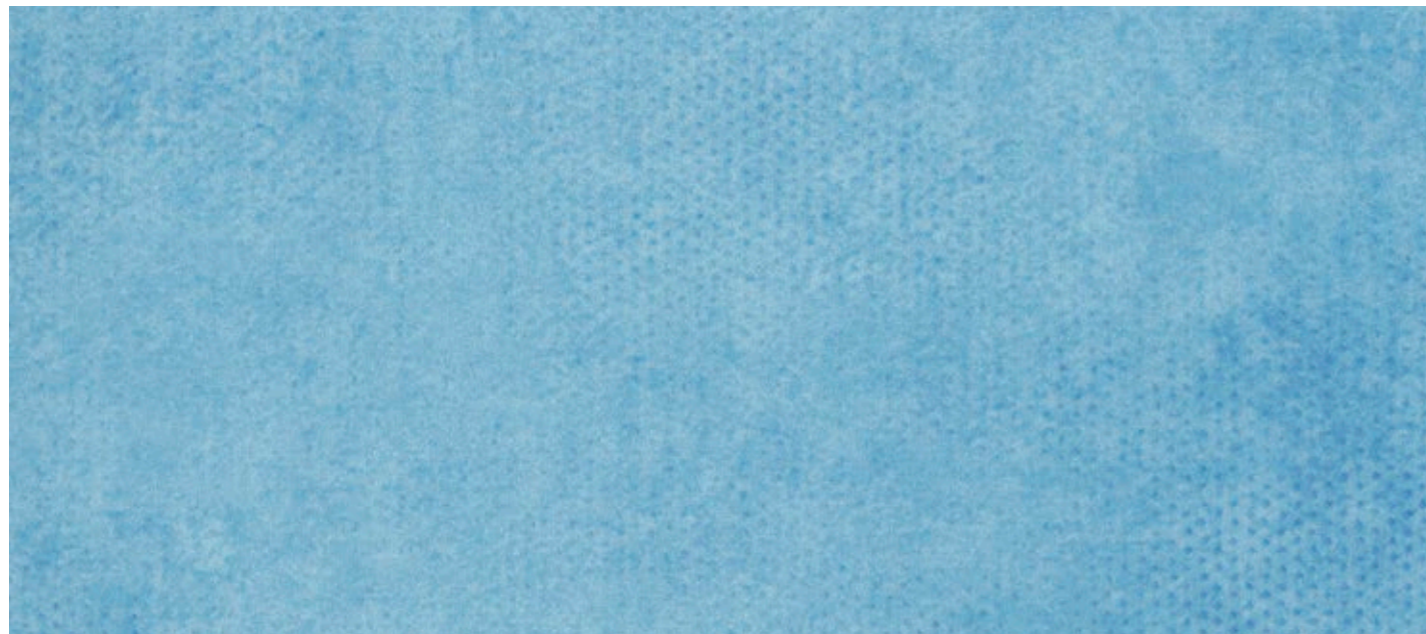

4313-458-4




4259-501-5




4259-503-5




4259-504-5

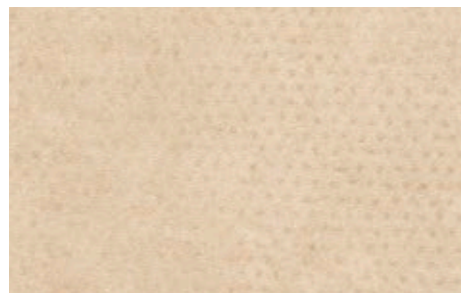


4313-471-4

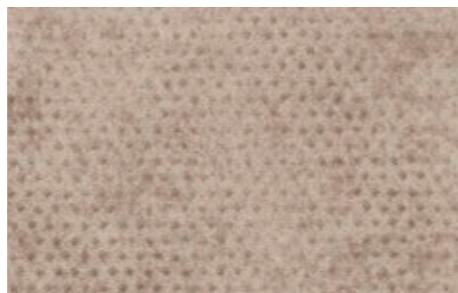


4313-470-4

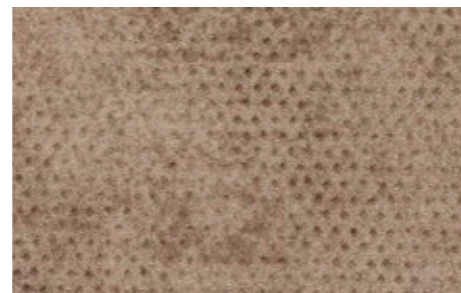


4313-467-4

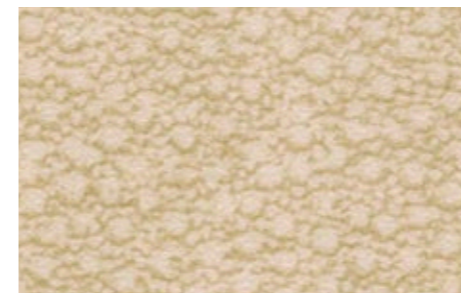

4276-451-4

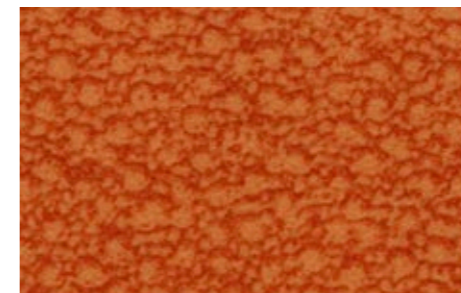

4276-465-4

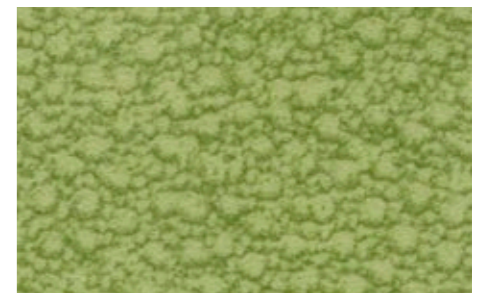


4276-462-4



4313-460-4




4313-464-4

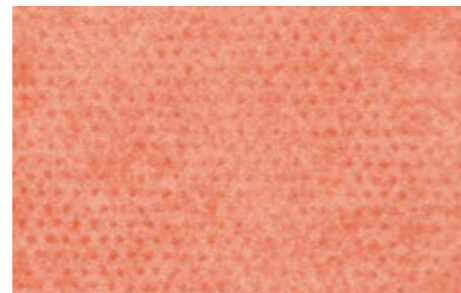

4313-465-4



4276-456-4

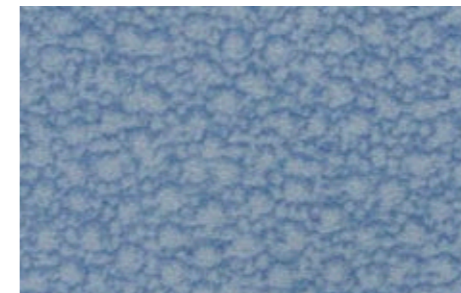

4276-472-4



4276-459-4



4313-472-4




4313-473-4



4313-474-4



4276-470-4

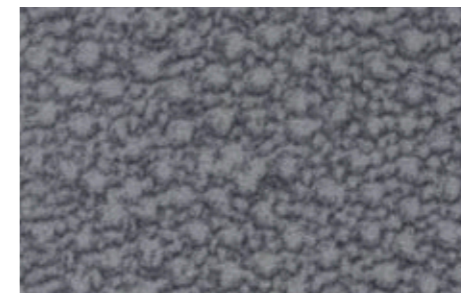

4276-471-4

