

BEKA RUBBER



Flooring that meets your needs

Technical Data Sheet: BeRoll Smyrna Eco
Revision: Feb 2023

BeRoll Smyrna Eco

BeRoll Smyrna Eco is a rugged, anti-slip and easy-to-clean floor covering rubber roll used in Fitness centers, commercial gyms, home gyms, exhibition halls, ice sports stadiums, rehabilitation centers, equipment storage rooms, etc.

Due to its high resistance to mechanical wear and abrasion resistance, BeRoll Smyrna Eco is a good alternative for those looking for a different aesthetic result to black color for their rubber flooring. BeRoll Smyrna Eco has 10% EPDM new granules with different EPDM colors and offers a distinctive touch to your flooring while you can be on a tight budget.

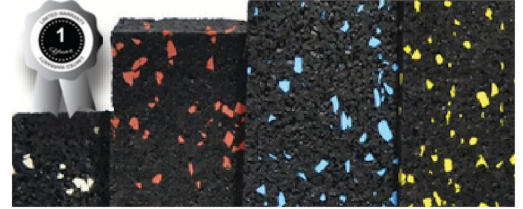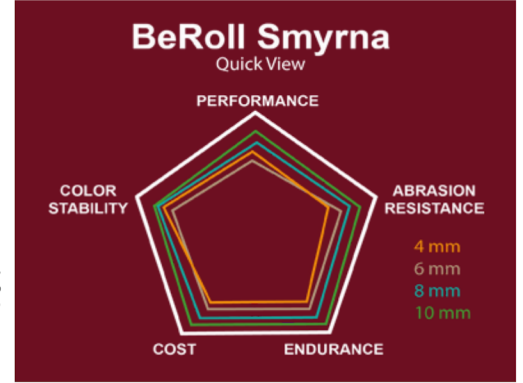

COMPOSITION

Recycled SBR granule, 10% new EPDM flecks in different colors, MDI polyurethane bonding agent.

EPDM COLOR CHAT

BE01 Latte Brown	BE02 Beige	BE03 Light Salmon	BE04 Pink	BE05 Rose Red	BE06 Dark Purple
BE07 Light Blue	BE08 Indian Red	BE09 Sea Green	BE10 Cany Pink	BE11 Caramel	BE12 Orange
BE13 Purple	BE14 Lime Green	BE15 Light Brown	BE16 Dark Blue	BE17 Yellow	BE18 Grey
BE19 Violet Blue	BE20 Light Grey	BE21 Turquoise	BE22 Light Green	BE23 May Green	BE24 White

There may be a tonal difference in the colors in the color chart according to the production time. The manufacturer company has adopted the principle of producing in the same colors as much as possible. Beka Sport is not responsible for problems caused by possible tonal differences in colors.

Beka Spor Zeminleri San. Ve Dış Tic. Ltd.
Şti. **Factory** : Saray Mh. 222 Cd. NO: 16/A,
06980

KAHRAMANKAZAN / ANKARA - TURKEY
+90 850 480 2352 – info@bekasport.com



BEKA RUBBER

Flooring that meets your needs

Technical Data Sheet: BeRoll Smyrna Eco
Revision: Feb 2023

SPECIFICATIONS

Usage	Indoor
Size	1000 x 120 cm 1500 x 120 cm 2000 x 120 cm
Thickness / Weight	10 mm / 10 kg/m ² 8 mm / 8 kg/m ² 6 mm / 6 kg/m ² 4 mm / 4 kg/m ²
Color	■ + 10% EPDM flecks.
Surface	Porous, soft and smooth
Density	980-1.020 kgs/m ³
Thickness Tolerance	5%



APPLICATION AREAS

Smyrna roll series have a wide application range depending on the thickness selected: protective cover for other flooring (exhibitions, etc.), personal or commercial gym flooring, fitness centers, etc.

PROPERTIES

Fire Resistance	Class E (DIN EN 13501-1, 2010)
Chemical Resistance	Conditionally resistant to acids and bases
Cold Fracture Resistance	24 hours / -20° C, no fracture
Cold Cracking Resistance	5 hours / -15° C, no crack
Temperature range	-30°C to 80°C (internally tested)

This TDS is for information purposes only and Beka Sport may change the specifications of this TDS without prior notice. Beka Sport will not be responsible for any misuse of this TDS. The latest version of this TDS can be found on the website www.bekarubber.com.

Beka Spor Zeminleri San. Ve Dış Tic. Ltd.
Şti. **Factory** : Saray Mh. 222 Cd. NO: 16/A,
06980

KAHRAMANKAZAN / ANKARA - TURKEY
+90 850 480 2352 – info@bekasport.com

