



19


FIRST LINES



LRV 25 L 57 176




LRV 26 L 57 181



LRV 9 L 37 811



LRV 7 L 31 856



LRV 17 L 49 996



LRV 18 L 49 901



LRV 10 L 38 916




LRV 12 L 41 921




LRV 8 L 32 556




LRV 8 L 32 571




LRV 5 L 27 576




LRV 7 L 32 581




LRV 4 L 22 546




LRV 4 L 23 541



LRV 4 L 22 966



LRV 4 L 23 971

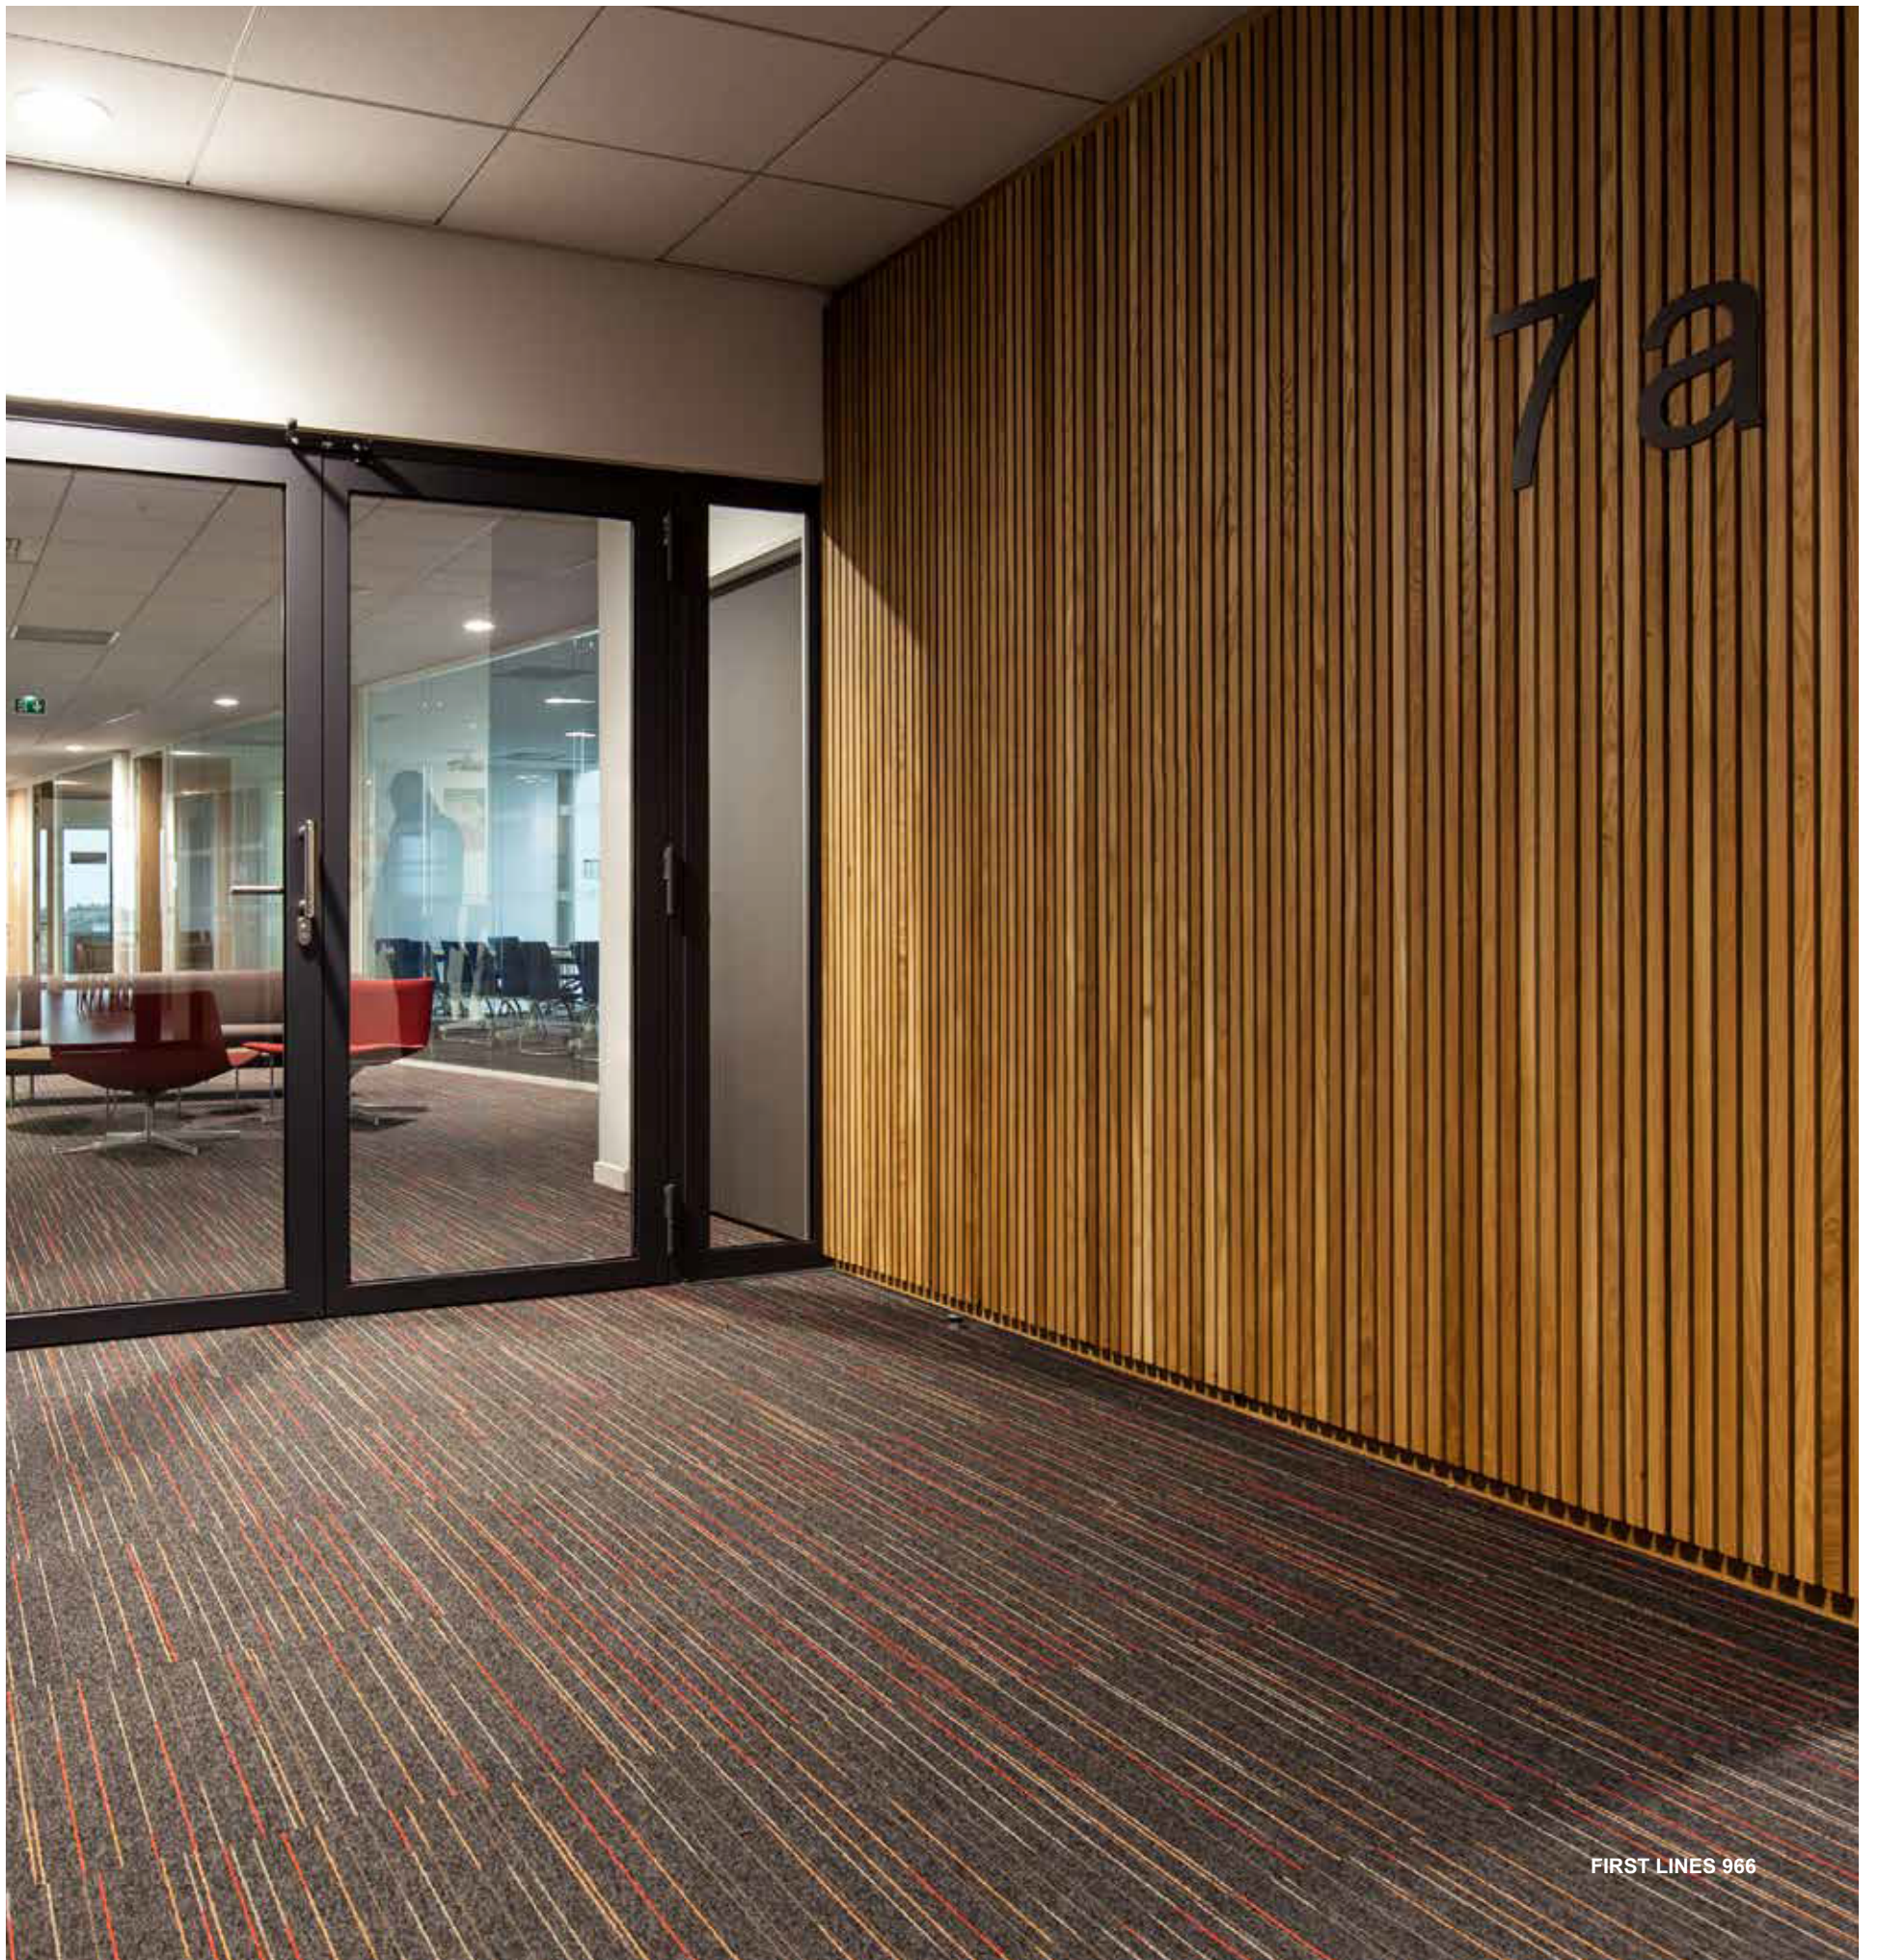

FIRST LINES 966

FIRST LINES

CONSTRUCTION	Tufted 1/10" Loop	FIRE RESISTANCE	EN 13501-1 B _{fl} -s1
PILE MATERIAL	92% PA 6 Solution Dyed Aqualon + 8% PA 6 Space Dyed	FASTNESS TO LIGHT	ISO 105-B02 ≥ 5-6
SECONDARY BACKING	Back2Back: Modified bitumen enhanced with a thermoplastic elastomer, reinforced with a glass fibre fleece covered with 100% PES fleece. 10% recycled content included.	RUBBING FASTNESS	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT	Ca. 4 300 g/m ²	COLOUR FASTNESS TO WATER	EN ISO 105-E01 ≥ 4
PILE WEIGHT	Ca. 540 g/m ²	THERMAL RESISTANCE	ISO 8302 0.047 m ² K/W
PILE ABOVE BACKING	Ca. 330 g/m ²	IMPACT NOISE RATING	ISO 10140 ΔL: 37 dB (1 000 Hz) ΔL _w : 25 dB
TOTAL HEIGHT	Ca. 6.4 mm	SOUND ABSORPTION	ISO 354 α _w : 0.20 Hz 125 250 500 1000 2000 4000 α _s 0.01 0.04 0.07 0.19 0.29 0.34
PILE HEIGHT	Ca. 2.9 mm	PERMANENT ANTISTATIC	ISO 6356 ≤ 2 kV
PILE DENSITY	Ca. 0.114 g/cm ³	TRANSVERSAL RESISTANCE	ISO/DIS 10965 ≤ 1 x 10 ⁹ Ohm
TUFT DENSITY	Ca. 156 000 /m ²	SIZE & PACKING	50 cm x 50 cm box: 5 m ² pallet: 20 boxes
CLASSIFICATION	EN 1307 33 - LC1	NUMBER OF COLOURS	16
CASTOR CHAIR SUITABILITY	EN 985 A: continuous use	DIMENSIONAL STABILITY	EN 986 Max. 0.2 %
DONNÉES ENVIRONNEMENTALES	Démarche HQE [®] : cf. FDES suivant NF P01-010 Déclaration du 30/07/2003	GUT-NR	EFEBD30E
		BRE	ENP 428
		LEED [®]	Product contributes toward satisfying Credits under LEED [®] . For more information, see the modulyss sustainable datasheets.
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.

