




CONSTRUCTION	Tufting 1/10" struct.loop pile	PERMANENTLY ANTISTATIC	ISO 6356
STRUCTURE	Tufté 1/10" bouclé structuré	ANTISTATIQUE PERMANENT	< 2 kV
STRUKTUR	Getuftet 1/10" Strukturschlinge	PERMANENT ANTISTATISCH	
STRUCTUUR	Getuft 1/10" structuurlus	PERMANENT ANTISTATISCH	
PILE MATERIAL	100% PA 6 IMPREL®	IMPACT NOISE RATING	ISO 140-8
COMPOSITION DU VELOURS		ISOLATION PHONIQUE	26 dB ΔLw
POLMATERIAL		TRITTSCHALLVERBESSERUNG	
POOLMATERIAAL		GELUIDSISOLATIE	
PRIMARY BACKING	Non woven PES	SOUND ABSORPTION	ISO 354
SUPPORT	Non tissé PES	ABSORPTION PHONIQUE	0.20 αw
TRÄGERMATERIAL	Vlies, PES	SCHALLABSORPTIONSGRAD	
TUFTDOEK	Vilt, PES	GELUIDSABSORPTIE	
SECONDARY BACKING	Action Back	THERMAL RESISTANCE	ISO 8302
DOSSIER		RÉSISTANCE THERMIQUE	0.09 m² K/W
RÜCKEN		WÄRMEDURCHLASSWIDERSTAND	
TAPIJTRUG		WARMTEDOORLAATWEERSTAND	
PILE WEIGHT	Ca. 1.100 gr/m²	FASTNESS TO LIGHT	ISO 105-B02
POIDS DU VELOURS		SOLIDITÉ A LA LUMIÈRE	≥ 5-6
POLEINSATZGEWICHT		LICHTECHTHEIT	
POOLGEWICHT		LICHTECHTHEID	
TOTAL WEIGHT	Ca. 2.060 gr/m²	COLOUR FASTNESS TO WATER	EN ISO 105-E01
POIDS TOTAL		SOLIDITÉ À L'EAU	≥ 4-5
GESAMTGEWICHT		WASSERECHEITHEIT	
TOTAAL GEWICHT		WATERECHEITHEID	
PILE HEIGHT	Ca. 5 mm	RUBBING FASTNESS	EN ISO 105-X12
EPAISSEUR DU VELOURS		SOLIDITÉ AU FROTTEMENT	≥ 4
POLHÖHE		REIBECHTHEIT	
POOLHOOGTE		WRIJFECHTHEID	
TOTAL HEIGHT	Ca. 8 mm	FIRE RESISTANCE	EN 13501-1
EPAISSEUR TOTAL		COMPOTEMENT AU FEU	Cfl-s1 (if glued)
GESAMTHÖHE		BRENNVERHALTEN	
TOTALE DIKTE		BRANDGEDRAG	
TUFT DENSITY	Ca. 221 000/m²	NUMBER OF COLOURS	14
NOMBRES DE POINTS		NOMBRES DE COULEURS	
NOPPENZAHL		ANZAHL FARBEN	
AANTAL PUNTEN		AANTAL KLEUREN	
PILE DENSITY	Ca. 0.125 g/cm³	WIDTH	EN ISO 3018
DENSITÉ DU VELOURS		LARGEUR	ca. 400 cm
POLROHDICHTHEIT		BREITE	
POOLDICHTHEID		BREEDTE	
CLASSIFICATION	EN 1307		
CLASSEMENT	32 - LC4		
KLASSIFIKATION			
CLASSIFICATIE			
CASTOR CHAIR SUITABILITY	EN 985		
CHAISE À ROULETTES	A: intensive use		
STUHLROLLENEIGNUNG			
ROLSTOELGESCHIKTHEID			
STAIR SUITABILITY	EN 1963		
ESCALIERS	A: intensive use		
TREPPENEIGNUNG			
TRAPPENGESCHIKTHEID			




EN14041
CE
14
Balta Industries - Kanegem- straat 15 - BE 8700 Tielt
DOP: 1011#IE0ACV
Textile Floor Covering EN1307
Notified body 0493
www.baltamediabank.com

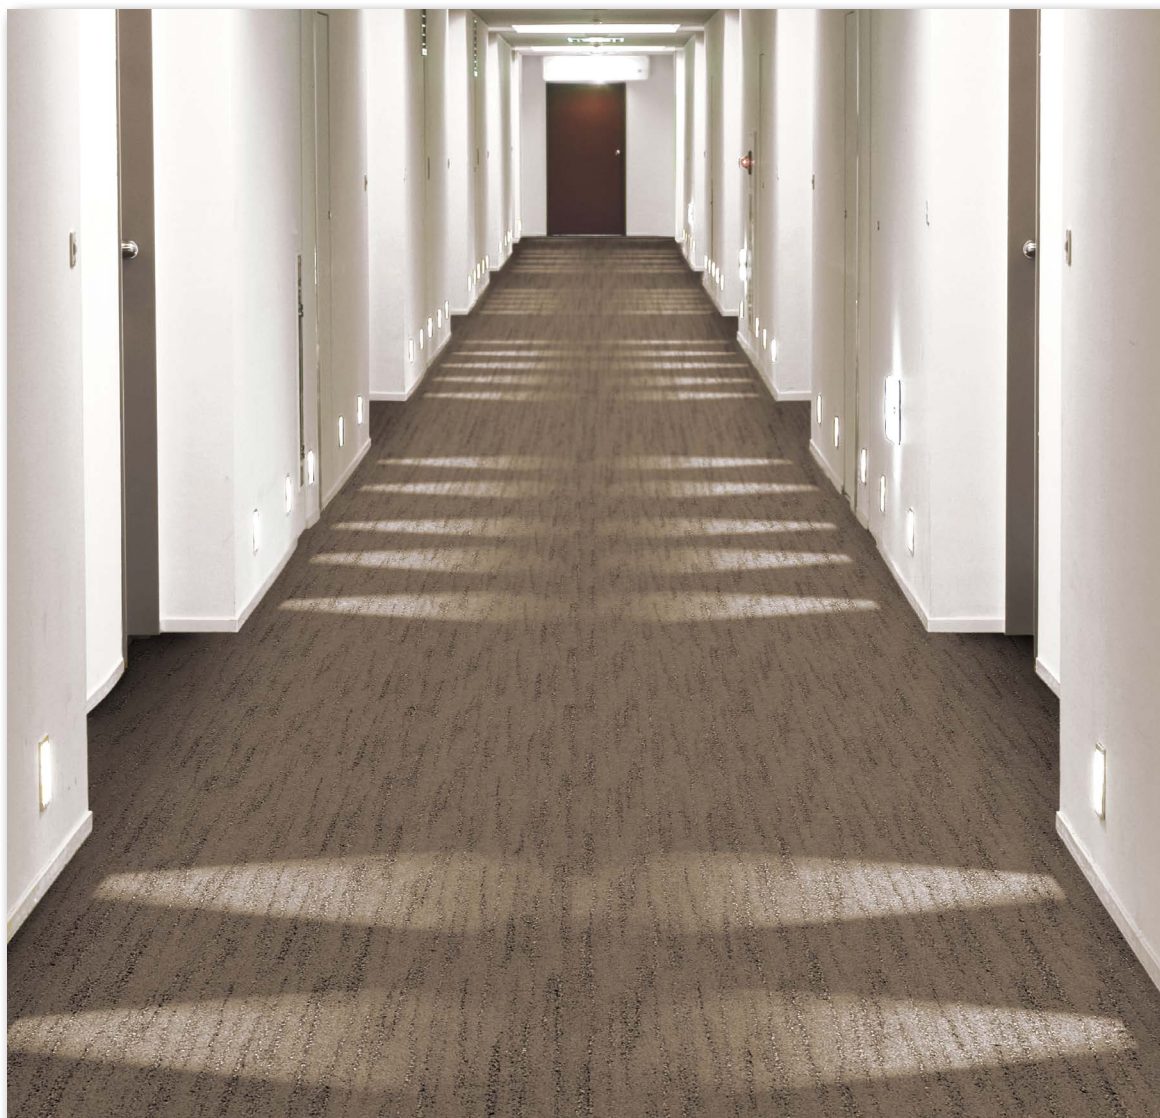


▲ 33




▲ 53



▲ 23




▲ 79




▲ 48




▲ 40




▲ 38




▲ 93




▲ 78




▲ 85




▲ 16



▲ 15



▲ 94



▲ 98