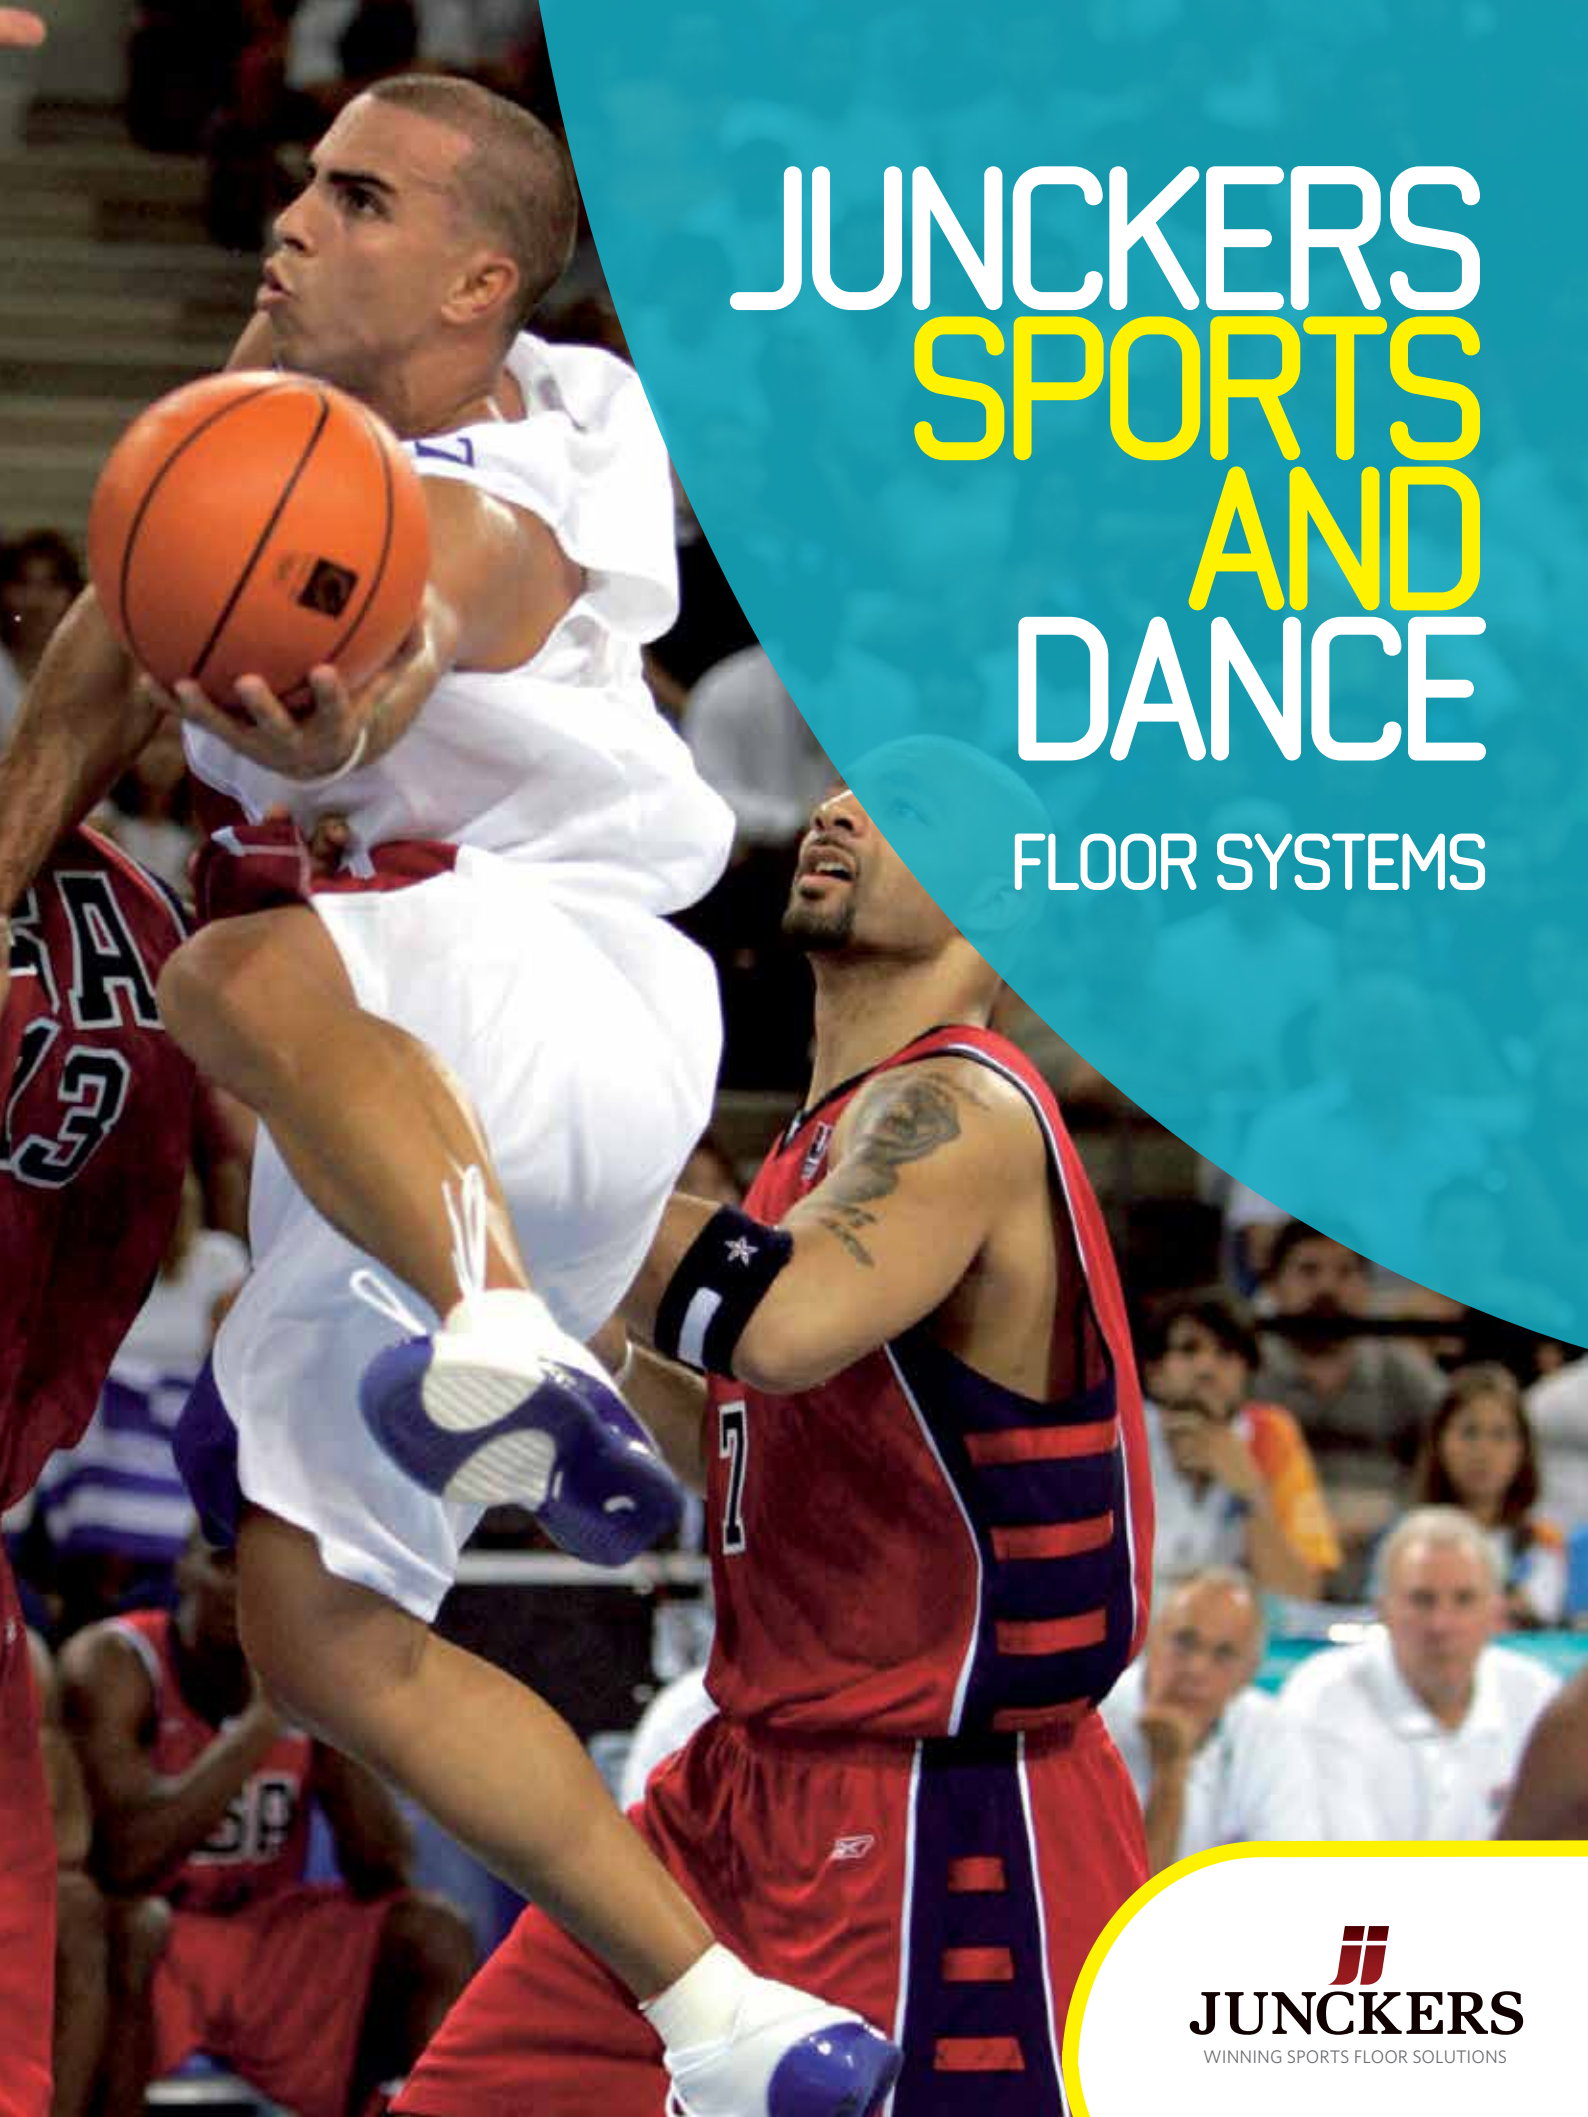


A dynamic action shot from a basketball game. A player in a white jersey is in mid-air, holding an orange basketball with both hands, preparing to shoot. He is being closely guarded by a player in a red jersey who is also jumping. The background shows a blurred crowd of spectators in a gymnasium. A large teal graphic element is on the right side of the image, containing the company name and tagline.

JUNCKERS SPORTS AND DANCE

FLOOR SYSTEMS

The logo consists of a stylized 'J' made of two parallel red lines.

JUNCKERS
WINNING SPORTS FLOOR SOLUTIONS


BLU BAT 52 - 67 - 79

The solid floorboards are nailed to a resilient subconstruction of one layer engineered battens including a continuous layer of 9 mm thick sports foam pre-mounted on the underside of the battens.

There is a choice of 3 batten thicknesses, 30mm 45mm or 57mm.

FEATURES

Performance	Area-elastic according to EN 14904 class A3
Use	Multi/single purpose/dance/fitness/squash Refurbishment Standard Performance sport
Floorboard type	Prefinished 22mm 2-strip solid hardwood parquet
Subconstruction	Single layer batten system
Batten centre c/c	Choice between 336mm and 411mm
Required subfloor	Even
Construction height	Choice between 52mm, 67mm, 79mm
Sanding and re-sealing	Yes to bare wood 8-10 times
Suitable for underfloor heating	Yes

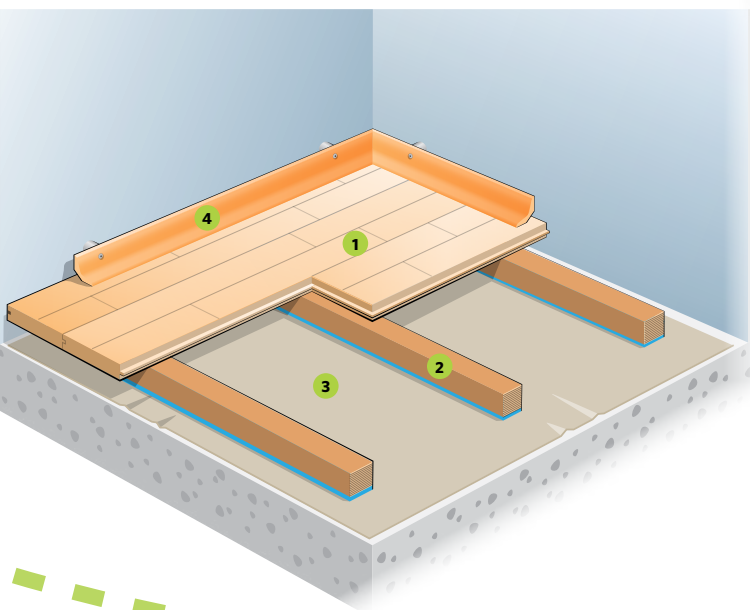

SYSTEM COMPONENTS

1. 22 x 129 x 3700mm floorboards
2. BluBAT batten system including sportsfoam
3. PE moisture barrier
4. Combi sports skirting

TEST	Requirements EN 14904:A3	Test results	
		411mm Batten centre	336mm
Shock absorption	≥ 40 < 55 %	55%	53%
Vertical deformation	≥ 1.8 < 3.5mm	1.9mm	1.8mm
Ball bounce	≥ 90 %	100%	98%
Friction	≥ 80 ≤ 110	~85	~85
Rolling load	≥ 1500 N	✓ 3000 N ¹⁾	✓ 3500 N ¹⁾
Point load	None	5000 N ~ 500 kgs ²⁾	5500 N ~ 550 kgs ²⁾

¹⁾ Junckers test with solid rubber wheels, width 50mm, diameter 100mm.

²⁾ Junckers test with 100x100mm point load.